

GH150-CNxx

DC-DC Power Supply Module

Ultra wide input, isolated single output

Product Characteristics

- Ultra wide input voltage range, 100-1000VDC
- Standard, CE (EN62477-1)
- Input and output isolation, 4000VDC
- Applications: energy storage system, photovoltaic power station, other high voltage input industrial equipment
- Input reversed polarity protection
- Output protection, OCP and SCP
- No minimum load requirement

Model Selection Table

Model	Dimensions (L*W*H)	Rated power	Rated output voltage/current		Typical efficiency (Vin=500VDC)
			Vo	Io	
GH150-CN12	170.0*113*42.8mm	100W	12V	8330mA	81%
GH150-CN15			15V	6670mA	82%
GH150-CN24		150W	24V	6250mA	83%
GH150-CN27			27V	5550mA	85%
GH150-CN28			28V	5350mA	85%
GH150-CN32			32V	4680mA	86%
GH150-CN48			48V	3120mA	88%

Input Characteristics

Item	Test Condition / Description	MIN	TYP	MAX
Input voltage range	DC input	100VDC	500VDC	1000VDC
Input current	Vin = 500VDC, output full load	-	-	500mA
Surge current	Vin = 500VDC	-	100A	-
Input reversed polarity protection	If input polarity is reversed, the PSU should not be damaged	Available		
External input fuse		Required		

Output Characteristics


Item	Test Condition / Description	MIN	TYP	MAX
Voltage accuracy		-	±2%	-
Line regulation	100%Io	-	±1.5%	-
Load regulation	10%-100%Io	-	±1.5%	-
Ripple and noise*	20MHz bandwidth (Peak-peak value)	-	400mV	-
OCP	Output overcurrent protection	≥110%Io, Self recovery		
SCP	Output short circuit protection	Self recovery		
Minimum load		0	-	-
Start-up delay time		-	1s	-
Hold-up time		-	10ms	-
Hot plug		Prohibited		
Paralleled working		Prohibited		

Remark*: Oscilloscope probe should be connected with the paralleled combination of a 10uF high frequency low resistance electrolytic capacitor and a 0.1uF ceramic capacitor.

General Characteristics

Item	Test Condition / Description	MIN	TYP	MAX
Working temperature		-40°C	-	+70°C
Storage temperature		-40°C	-	+85°C
Storage humidity		-	-	95%RH
Switching frequency		-	65kHz	-
Isolation voltage	Input to output, 60s, ≤5mA	4000VDC	-	-
MTBF	MIL-HDBK-217F@25°C	215000h	-	-
Weight		-	1300g	-
Cooling method	Forced air cooling is recommended	Natural air cooling		


Derating Curves

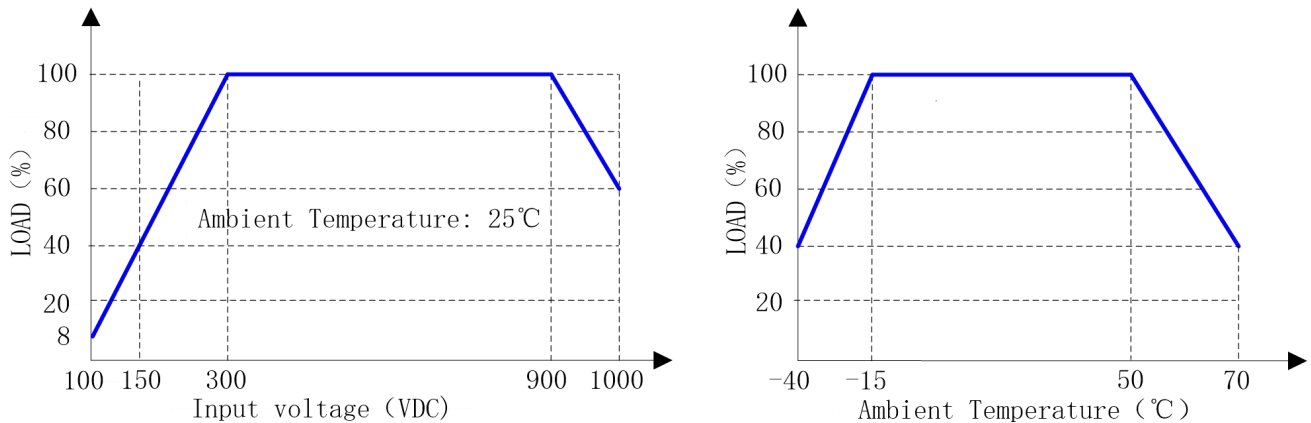

Comment: Both temperature derating and input voltage derating should be considered.

Application Notes

1. Application circuit recommendation

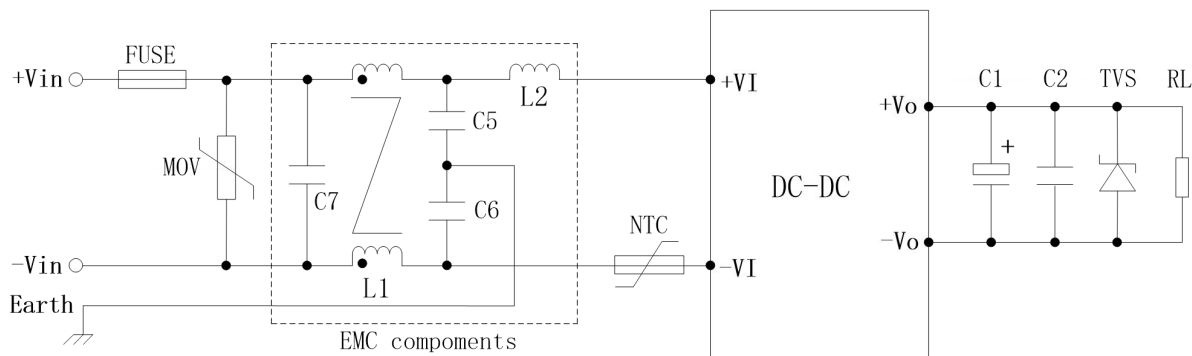

2. Input part recommendation

Component	Function and description	Recommendation
FUSE	Cut off fault circuit	Required, 6A, time lag type is preferred
NTC	Limit the surge current	Negative temperature coefficient resistor, 5D-20
MOV	Absorb surge energy	Varistor, 152KD14
C7	EMC component, X-CAP	Two 0.33uF safety X1 capacitors in series
L1	EMC component	Common mode inductor, >10mH
L2	EMC component	Differential mode inductor, 330μH
C5, C6	EMC component	Two 1nF safety Y1 capacitors in series

3. Output part recommendation

Output voltage	C1	C2	TVS	RL
12V	680 μ F/25V	1 μ F/50V	1.5KE18CA	User load
15V	680 μ F/25V	1 μ F/50V	1.5KE20CA	
24V	470 μ F/35V	1 μ F/50V	1.5KE30CA	
27V	220 μ F/35V	1 μ F/50V	1.5KE36CA	
28V	220 μ F/35V	1 μ F/50V	1.5KE36CA	
32V	100 μ F/50V	1 μ F/50V	1.5KE39CA	
48V	100 μ F/63V	1 μ F/100V	1.5KE62CA	

Remarks:

- C1: Output filter electrolytic capacitor, high frequency low resistance electrolytic capacitor is recommended.
- C2: Ceramic capacitor to suppress high frequency noise.
- TVS: Transient suppression diode to protect post-stage circuit (user load).

Notes:

- If not specified, the test condition is ambient temperature 25 $^{\circ}$ C, humidity < 75%, input voltage 500VDC and output rated load.
- All parameters listed in the data sheet are tested according to the company's enterprise standards.
- Guangzhou Guantu Electronic Technology Co., Ltd. has the right of final interpretation of the copyright and product.
- This version is 2023.01 A2. The specification may be changed without notice.
- GTL POWER can provide product customization service, please contact us or visit <http://www.gtl-power.com> and provide more detail technical requirements.